



Features

- High - efficiency Air Performance
- Reliable Structural Design
- Convenient and Flexible Installation
- CE Marked on all models
- 2 Year Warranty






GENERAL SPECIFICATION

Bearing Type	Sleeve Bearing & Ball Bearing
Material	Impeller: Plastic Frame: Aluminum Alloy

Lead Wire	UL Type
Operation Temperature	-10°C - 65°C, 35% - 85%RH
Storage Temperature	-40°C - 70°C, 35% - 85%RH

4" Axial Fan

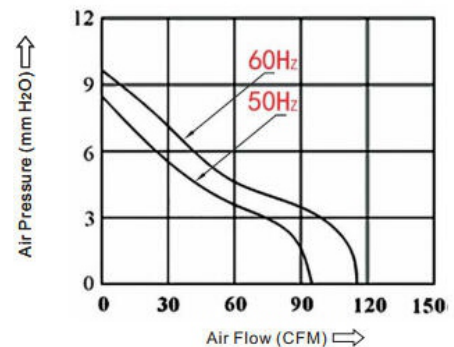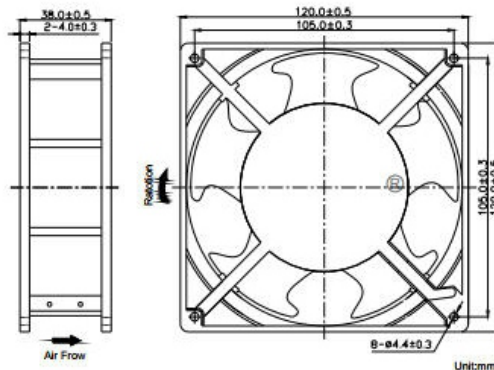



Size: 120x120x38

DIMENSION

P&Q CURVE (at Rated Voltage)

Model	Type	Bearing Type	Voltage	Frequency	Current Amp	Power	Speed R/min	Noise DB(A)	Air Flow	
									m ³ / min	CFM
SL-12038-A230-W	Square	Sleeve Bearing	230VAC	50/60	0.14	21	2600/2800	43/48	138/162	82/95

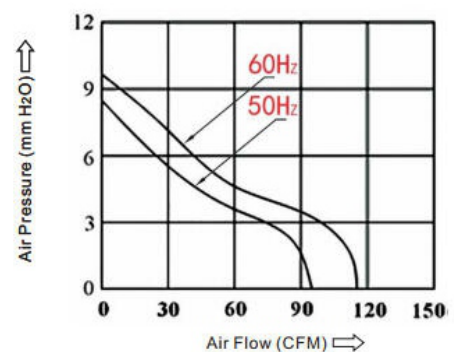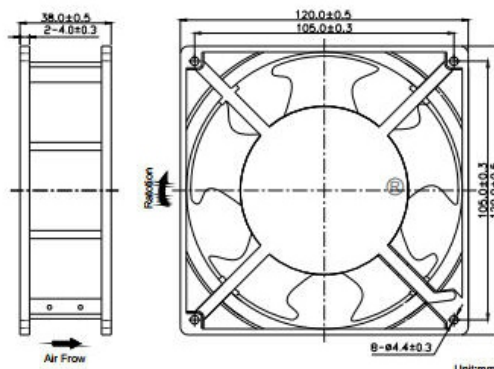

Size: 120x120x38

DIMENSION


P&Q CURVE (at Rated Voltage)

Model	Type	Bearing Type	Voltage	Frequency	Current Amp	Power	Speed R/min	Noise DB(A)	Air Flow	
									m ³ / min	CFM
BB-12038-A230-W	Square	Ball Bearing	230VAC	50/60	0.14	21	2600/2800	43/48	138/162	82/95


6" Axial Fan



Size: 170x170x50

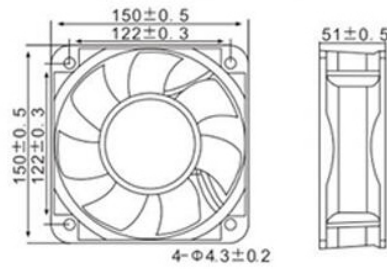

DIMENSION




P&Q CURVE (at Rated Voltage)


Model	Type	Bearing Type	Voltage	Frequency	Current Amp	Power	Speed R/min	Noise DB(A)	Air Flow	
									m ³ / min	CFM
BB-17050-A230-W	Round	Ball Bearing	230VAC	50/60	0.20	35	2200/2600	49/54	272/300	160/176



Size: 172x150x51



DIMENSION




P&Q CURVE (at Rated Voltage)


Model	Type	Bearing Type	Voltage	Frequency	Current Amp	Power	Speed R/min	Noise DB(A)	Air Flow	
									m ³ / min	CFM
BB-17251-A230-W	Oval	Ball Bearing	230VAC	50/60	0.20	35	2200/2600	49/54	272/300	160/176



Size: 150x150x50

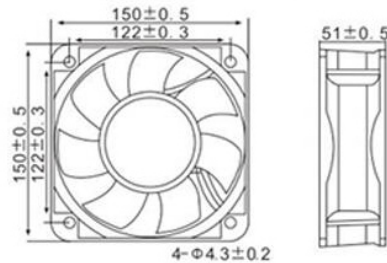

DIMENSION

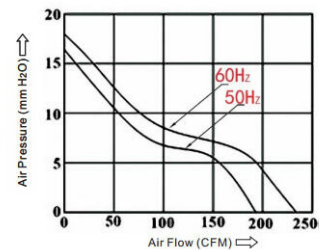


P&Q CURVE (at Rated Voltage)


Model	Type	Bearing Type	Voltage	Frequency	Current Amp	Power	Speed R/min	Noise DB(A)	Air Flow	
									m ³ / min	CFM
BB-15050-A230-W	Square	Ball Bearing	230VAC	50/60	0.20	35	2200/2600	49/54	272/300	160/176



Size: 172x172x50

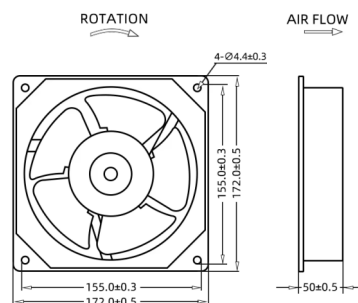



DIMENSION



P&Q CURVE (at Rated Voltage)

Model	Type	Bearing Type	Voltage	Frequency	Current Amp	Power	Speed R/min	Noise DB(A)	Air Flow	
									m ³ / min	CFM
BB-SR-17251-A230-W	Square Round	Ball Bearing	230VAC	50/60	0.20	35	2200/2600	49/54	272/300	160/176

8" Axial Fan

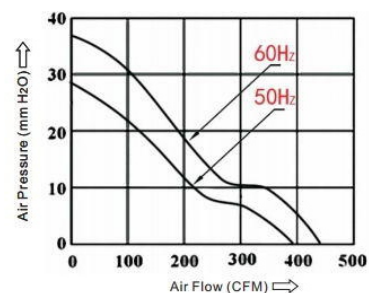
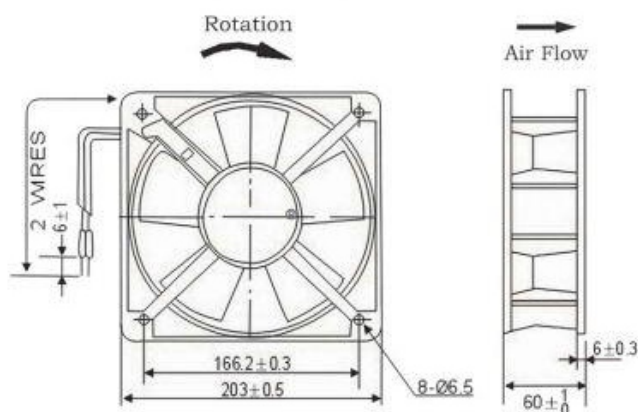


Size: 200x200x60

DIMENSION

P&Q CURVE (at Rated Voltage)

Model	Type	Bearing Type	Voltage	Frequency	Current Amp	Power	Speed R/min	Noise DB(A)	Pressure MMH2O	CFM
BB-20060-A230-W	Square	Ball Bearing	230VAC	50/60	0.45/0.40	72/50	2350/2500	64/66	17/19	335/350

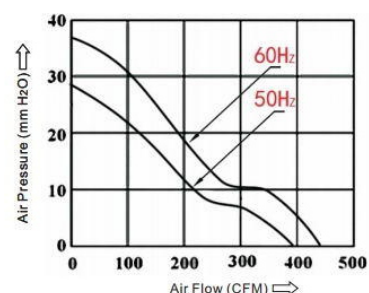
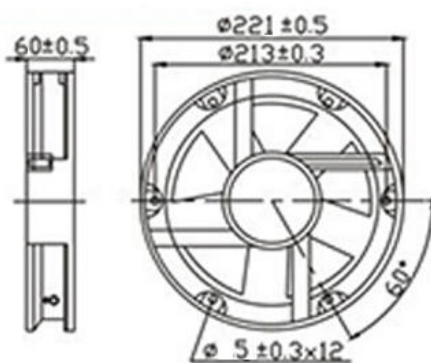


Size: 220x220x60

DIMENSION

P&Q CURVE (at Rated Voltage)

Model	Type	Bearing Type	Voltage	Frequency	Current Amp	Power	Speed R/min	Noise DB(A)	Pressure MMH2O	CFM
BB-22060-A230-W	Round	Ball Bearing	230VAC	50/60	0.45/0.40	72/50	2350/2500	64/66	17/19	335/350

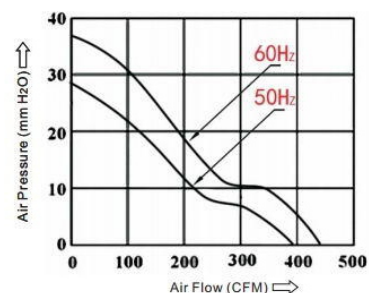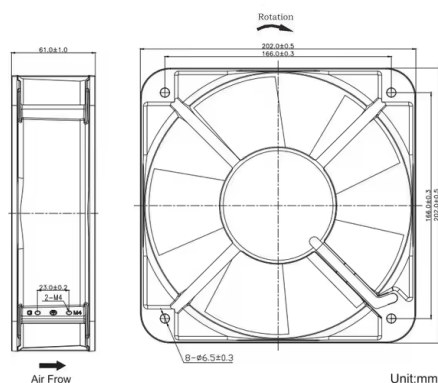

Size: 200x200x60

DIMENSION

P&Q CURVE (at Rated Voltage)

Model	Type	Bearing Type	Voltage	Frequency	Current Amp	Power	Speed R/min	Noise DB(A)	Pressure MMH2O	CFM
BB-22060-A230-W	Round	Ball Bearing	230VAC	50/60	0.45/0.40	72/50	2350/2500	64/66	17/19	335/350