



- SWITCH MODE POWER SUPPLY
- INDICATORS & PUSH BUTTON
- PROXIMITY & PHOTOELECTRIC SENSORS

- AXIAL FAN
- SOLID STATE RELAY
- LIMIT SWITCH

SWITCH MODE POWER SUPPLY



MODEL	VOLT	AMP	DIMENSION (L*W*H)	M.R.P.
LRS-25-5	5V	5.0A	84x58x38mm	1400
LRS-25-12	12V	2.1A	84x58x38mm	1400
LRS-25-24	24V	1.1A	84x58x38mm	1400
LRS-35-5	5V	7.0A	84x58x38mm	1465
LRS-35-12	12V	3.0A	84x58x38mm	1465
LRS-35-24	24V	1.5A	84x58x38mm	1465
LRS-60-12	12V	5 A	99x82x30mm	1550
LRS-60-24	24V	2.5 A	99x82x30mm	1550
LRS-120-12	12V	10 A	129x97x30mm	1950
LRS-120-24	24V	5 A	129x97x30mm	1950

DUAL VOLT SERIES

MODEL	VOLT	AMP	VOLT	AMP	M.R.P.
	CH1		CH2		
LRS60A	5V	4A	12V	3A	2695
LRS60B	5V	3A	24V	1.8A	2695
LRS60A-D60C	12V	2.5A	-12V	2.5A	2695

TRIPLE VOLT SERIES

MODEL	VOLT	AMP	VOLT	AMP	VOLT	AMP	M.R.P.
	CH1		CH2		CH3		
LRS60A-T60C	5V	5A	15V	2A	-15V	0.5A	2845
LRS60A-T60B	5V	5A	12V	2.5A	-12V	0.5A	2845

QUAD VOLT SERIES

MODEL	VOLT	AMP	VOLT	AMP	VOLT	AMP	VOLT	AMP	M.R.P.
	CH1		CH2		CH3		CH4		
LRS60A-Q60D	5V	4A	12V	1A	24V	1A	-12V	0.5A	2890
LRS60A-Q60B	5V	5.5A	12V	2A	-5V	0.5A	-12V	0.5A	2890

NOTE: LRS-60A/B DIMENSION: 159x97x38mm (L*W*H)



LRS-150 LRS-250 LRS-350 LRS-500/600

MODEL	VOLT	AMP	DIMENSION (L*W*H)	M.R.P.
LRS-150-12	12V	12.5A	159x97x30mm	2580
LRS-150-24	24V	6.5A	159x97x30mm	2580
LRS-150-48	48V	3.1A	159x97x30mm	2795
LRS-250-12	12V	20A	215x115x30mm	4035
LRS-250-24	24V	10A	215x115x30mm	4035
LRS-250-48	48V	5A	215x115x30mm	4195
LRS-350-12	12V	29.5A	215x115x30mm	4425
LRS-350-15	15V	23.3A	215x115x30mm	4795
LRS-350-24	24V	14.6A	215x115x30mm	4425
LRS-350-48	48V	7.3A	215x115x30mm	4795
LRS-500-12	12V	41A	240x125x65mm	8600
LRS-500-24	24V	20A	240x125x65mm	8600
LRS-500-48	48V	10A	240x125x65mm	9320
LRS-600-12	12V	50A	240x125x65mm	9521
LRS-600-24	24V	25A	240x125x65mm	9521

ACCESSORIES - DIN RAIL CLAMP

MODEL	COMPATIBLE MODEL	M.R.P.
CL-01	LRS-60 LRS-120 LRS-150	205
CL-02	LRS-250 LRS-350	220

SOLID STATE RELAY & HEAT SINK



DC-AC SERIES


MODEL	OUTPUT	TYPE	MPQ	M.R.P.
SRDA-16	16A	DC-AC	10	470
SRDA-25	25A	DC-AC	10	565
SRDA-40	40A	DC-AC	10	655

AC-AC SERIES

MODEL	OUTPUT	TYPE	MPQ	M.R.P.
SRAA-16	16A	AC-AC	10	500
SRAA-25	25A	AC-AC	10	600
SRAA-40	40A	AC-AC	10	690



HS-01-BK



HS-DR-02

ACCESSORIES - HEAT SINK

MODEL	MOUNT	DIMENSION (L*W*H)	M.R.P.
HS-01-BK	PANEL MOUNT	69x51x24mm	210
HS-DR-02	DIN RAIL MOUNT	68x43x45mm	300

LIMIT SWITCH



MODEL	DESCRIPTION	MPQ	M.R.P.
SLZ-204S	Roller Lever	1	1845
SLZ-207	Adjustable Lever	1	1825
SLZ-208S	Adjustable Roller Lever	1	1875
SLZ-211	Plug Column	1	1825
SLZ-212	Roller Plug Column	1	1825
SLZ-222	Cross Roller Plug Column	1	1825
SLZ-268	Spring Wire Hard Rod	1	1825
SLZ-SW1	SLZ Series Switch 	10	535

MODEL	DESCRIPTION	MPQ	M.R.P.
CLZ-8104S	Roller Lever (Metal Roller)	10	950
CLZ-8107	Adjustable Lever	10	900
CLZ-8108	Adjustable Roller Lever (Nylon Roller)	10	900
CLZ-8108S	Adjustable Roller Lever (Metal Roller)	10	950
CLZ-8111	Plug Column	10	770
CLZ-8112	Roller Plug Column	10	770
CLZ-8122	Cross Roller Plug Column	10	770
CLZ-8166	Spring Soft Rod	10	785
CLZ-8167	Spring Wire	10	785
CLZ-8168	Spring Wire Hard Rod	10	785
CLZ-8169	Spring Wire Rod	10	785




MODEL	DESCRIPTION	MPQ	M.R.P.
PLE-101	Plug Column	10	570
PLE-103	Roller Plug Column	10	570
PLE-111	Roller Arm Lever (Horizontal)	10	570
PLE-121	Roller Lever	10	615
PLE-131	Adjustable Roller Lever	10	615

BASIC & MICRO SWITCH



MODEL	DESCRIPTION	MPQ	M.R.P.
BSZ-15-H	Hing Lever	20	340
BSZ-15-HS	Short Hing Lever	20	340
BSZ-15-RH	Roller Hing Lever	20	360
BSZ-15-RHS	Roller Short Hing Lever	20	360
BSZ-15-PS	Short Pin Plunger	20	360
BSZ-15-P	Pin Plunger	20	435
BSZ-15-RP	Roller Pin Plunger	20	485
BSZ-15-RPC	Cross Roller Pin Plunger	20	485

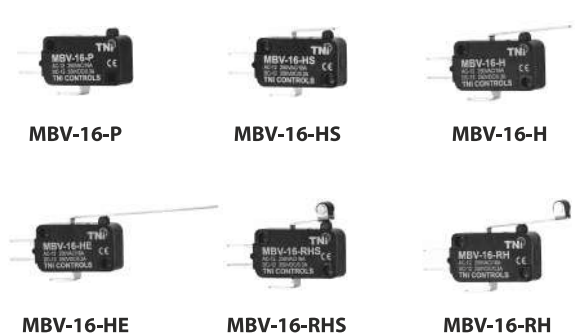

MODEL	DESCRIPTION	MPQ	M.R.P.
MBV-16-P	Pin Plunger	100	105
MBV-16-HS	Short Hinge Lever	100	110
MBV-16-H	Hinge Lever	100	110
MBV-16-HE	Extended Hinge Lever	100	110
MBV-16-RHS	Roller Short Hinge Lever	100	110
MBV-16-RH	Roller Hinge Lever	100	110

INDUCTIVE PROXIMITY SENSOR



NON-FLUSH



FLUSH



NON-FLUSH



FLUSH

CMD12 Ø12mm | LENGTH: 60mm

MODEL	TYPE	LOGIC	OUTPUT	MOUNT	RANGE	M.R.P.
CMD12-N4-O	DC	NPN	NO	NON FLUSH	4 mm	415
CMD12-N4-C	DC	NPN	NC		4 mm	415
CMD12-N4-OC	DC	NPN	NO+NC		4 mm	495
CMD12-N2-O	DC	NPN	NO	FLUSH	2 mm	415
CMD12-N2-C	DC	NPN	NC		2 mm	415
CMD12-N2-OC	DC	NPN	NO+NC		2 mm	495
CMD12-P4-O	DC	PNP	NO	NON FLUSH	4 mm	415
CMD12-P4-C	DC	PNP	NC		4 mm	415
CMD12-P4-OC	DC	PNP	NO+NC		4 mm	495
CMD12-P2-O	DC	PNP	NO	FLUSH	2 mm	415
CMD12-P2-C	DC	PNP	NC		2 mm	415
CMD12-P2-OC	DC	PNP	NO+NC		2 mm	495
CMA12-4-O	AC	-	NO	NON FLUSH	4 mm	495
CMA12-4-C	AC	-	NC	FLUSH	4 mm	495

CMD18 Ø18mm | LENGTH: 65mm

MODEL	TYPE	LOGIC	OUTPUT	MOUNT	RANGE	M.R.P.
CMD18-N8-O	DC	NPN	NO	NON FLUSH	8 mm	450
CMD18-N8-C	DC	NPN	NC		8 mm	450
CMD18-N8-OC	DC	NPN	NO+NC		8 mm	530
CMD18-N5-O	DC	NPN	NO	FLUSH	5 mm	450
CMD18-N5-C	DC	NPN	NC		5 mm	450
CMD18-N5-OC	DC	NPN	NO+NC		5 mm	530
CMD18-P8-O	DC	PNP	NO	NON FLUSH	8 mm	450
CMD18-P8-C	DC	PNP	NC		8 mm	450
CMD18-P8-OC	DC	PNP	NO+NC		8 mm	530
CMD18-P5-O	DC	PNP	NO	FLUSH	5 mm	450
CMD18-P5-C	DC	PNP	NC		5 mm	450
CMD18-P5-OC	DC	PNP	NO+NC		5 mm	530
CMA18-8-O	AC	-	NO	NON FLUSH	8 mm	520
CMA18-8-C	AC	-	NC	FLUSH	8 mm	520



NON-FLUSH



FLUSH

CMD08 Ø8mm | LENGTH: 50mm

MODEL	TYPE	LOGIC	OUTPUT	MOUNT	RANGE	M.R.P.
CMD08-N2-O	DC	NPN	NO	NON FLUSH	2 mm	640
CMD08-P2-O	DC	PNP	NO	FLUSH	2 mm	640
CMD08-N1.5-O	DC	NPN	NO	FLUSH	1.5 mm	640
CMD08-P1.5-O	DC	PNP	NO		1.5 mm	640
CMA08-2-O	AC	-	NO	NON FLUSH	2 mm	640
CMA08-2-C	AC	-	NC	FLUSH	2 mm	640



NON-FLUSH



FLUSH

CMD30 Ø30mm | LENGTH: 65mm

MODEL	TYPE	LOGIC	OUTPUT	MOUNT	RANGE	M.R.P.
CMD30-N15-OC	DC	NPN	NO+NC	NON FLUSH	15 mm	870
CMD30-P15-OC	DC	PNP	NO+NC		15 mm	870
CMD30-N10-OC	DC	NPN	NO+NC	FLUSH	10 mm	870
CMD30-P10-OC	DC	PNP	NO+NC		10 mm	870
CMA30-15-O	AC	-	NO	NON FLUSH	15 mm	900
CMA30-15-C	AC	-	NC	FLUSH	15 mm	900

CONNECTOR TYPE SENSOR & CONNECTOR WIRE



NON-FLUSH



FLUSH

CMD12-C Ø12mm | LENGTH: 66mm

MODEL	TYPE	LOGIC	OUTPUT	MOUNT	RANGE	M.R.P.
CMD12-C-N4-OC	DC	NPN	NO+NC	NON FLUSH	4 mm	630
CMD12-C-P4-OC	DC	PNP	NO+NC		4 mm	630
CMD12-C-N2-OC	DC	NPN	NO+NC	FLUSH	2 mm	630
CMD12-C-P2-OC	DC	PNP	NO+NC		2 mm	630



NON-FLUSH



FLUSH

CMD18-C Ø18mm | LENGTH: 67.5mm

MODEL	TYPE	LOGIC	OUTPUT	MOUNT	RANGE	M.R.P.
CMD18-C-N8-OC	DC	NPN	NO+NC	NON FLUSH	8 mm	835
CMD18-C-P8-OC	DC	PNP	NO+NC		8 mm	835
CMD18-C-N5-OC	DC	NPN	NO+NC	FLUSH	5 mm	835
CMD18-C-P5-OC	DC	PNP	NO+NC		5 mm	835



WCR12-4, 2 MTR WIRE



WC12-4, 2 MTR WIRE

MODEL	CONNECTOR SIZE	TYPE	LENGTH	M.R.P.
WCR12-4	12mm	ANGLED	2 MTR	480
WC12-4	12mm	STRAIGHT	2 MTR	480



WCR12-4-5M, 5 MTR WIRE



WC12-4-5M, 5 MTR WIRE

MODEL	CONNECTOR SIZE	TYPE	LENGTH	M.R.P.
WCR12-4-5M	12mm	ANGLED	5 MTR	715
WC12-4-5M	12mm	STRAIGHT	5 MTR	715

DIFFUSE PHOTOELECTRIC SENSOR



CPDD18 Ø18mm | LENGTH: 67.5mm

MODEL	TYPE	LOGIC	OUTPUT	RANGE	M.R.P.
CPDD18-P500-O	DC	PNP	NO	500 mm	900
CPDD18-P500-OC	DC	PNP	NO+NC	500 mm	1080
CPDD18-N500-OC	DC	NPN	NO+NC	500 mm	1080
CPDA18-500-O	AC	-	NO	500 mm	1085
CPDA18-500-C	AC	-	NC	500 mm	1085



CPDD18 (PLASTIC BODY) Ø18mm | LENGTH: 63mm

MODEL	TYPE	LOGIC	OUTPUT	RANGE	M.R.P.
CPDD18-N500-O(PB)	DC	NPN	NO	500 mm	900
CPDD18-P500-O(PB)	DC	PNP	NO	500 mm	900
CPDD18-P3000-OC(PB)	DC	PNP	NO+NC	3 MTR	1300



RETRO REFLECTIVE PHOTOELECTRIC SENSOR



CPRD18 Ø18mm | LENGTH: 67.5mm

MODEL	TYPE	LOGIC	OUTPUT	RANGE	M.R.P.
CPRD18-N4M-OC	DC	NPN	NO+NC	4 MTR	1120
CPRD18-P4M-OC	DC	PNP	NO+NC	4 MTR	1120



CPRD30 Ø30mm | LENGTH: 63mm

MODEL	TYPE	LOGIC	OUTPUT	RANGE	M.R.P.
CPRD30-N4M-OC	DC	NPN	NO+NC	4 MTR	1350
CPRD30-P4M-OC	DC	PNP	NO+NC	4 MTR	1350

THROUGH BEAM PHOTO SENSOR



EMITTER

RECEIVER

CPDT18 Ø18mm | LENGTH: 67.5mm

MODEL	TYPE	LOGIC	OUTPUT	RANGE	M.R.P.
CPDT18-N5M-OC	DC	NPN	NO+NC	5 MTR	1500
CPDT18-P5M-OC	DC	PNP	NO+NC	5 MTR	1500

PROXIMITY CONTROL UNIT



PR-350 85x52x70mm (L*W*H)

MODEL	TYPE	RELAY OUTPUT	M.R.P.
PR-350	PNP/NPN (Selectable)	1C/O	1000

CAPACITIVE PROXIMITY SENSOR



Ø18mm, NON-FLUSH



Ø30mm, NON-FLUSH

CCD18 Ø18mm | LENGTH: 65mm

MODEL	TYPE	LOGIC	OUTPUT	MOUNT	RANGE	M.R.P.
CCD18-N8-OC	DC	NPN	NO+NC	NON	8 mm	1310
CCD18-P8-OC	DC	PNP	NO+NC	FLUSH	8 mm	1310

CCD30 Ø30mm | LENGTH: 65mm

MODEL	TYPE	LOGIC	OUTPUT	MOUNT	RANGE	M.R.P.
CCD30-N15-OC	DC	NPN	NO+NC	NON	15 mm	1475
CCD30-P15-OC	DC	PNP	NO+NC	FLUSH	15 mm	1475

BOX TYPE PROXIMITY SENSOR



BMD25



BMD36

BMD25 17x17x28mm(L*W*H)

MODEL	TYPE	LOGIC	OUTPUT	RANGE	M.R.P.
BMD25-N5-O	DC	NPN	NO	5 mm	400
BMD25-P5-O	DC	PNP	NO	5 mm	400

BMD36 18x18x36mm(L*W*H)

MODEL	TYPE	LOGIC	OUTPUT	RANGE	M.R.P.
BMD36-N8-O	DC	NPN	NO	8 mm	400
BMD36-P8-O	DC	PNP	NO	8 mm	400

LED PILOT LAMP



Ø22.5mm

MODEL	COLOUR	VOLT	MPQ	M.R.P.
GLP22-A230-R	RED	230V AC	10	55
GLP22-A230-G	GREEN		10	55
GLP22-A230-Y	YELLOW		10	55
GLP22-A230-B	BLUE		10	55
GLP22-A230-W	WHITE		10	55
GLP22-A230-A	AMBER		10	55
GLP22-D24-R	RED	24V DC	10	60
GLP22-D24-G	GREEN		10	60
GLP22-D24-Y	YELLOW		10	60
GLP22-D24-B	BLUE		10	60
GLP22-D24-W	WHITE		10	60
GLP22-D24-A	AMBER		10	60

Ø16mm

MODEL	COLOUR	VOLT	MPQ	M.R.P.
LP16-A230-R	RED	230V AC	20	68
LP16-A230-G	GREEN		20	68
LP16-A230-Y	YELLOW		20	68
LP16-A230-B	BLUE		20	68
LP16-A230-W	WHITE		20	68
LP16-A230-A	AMBER		20	68
LP16-D24-R	RED	24V DC	20	70
LP16-D24-G	GREEN		20	70
LP16-D24-Y	YELLOW		20	70
LP16-D24-B	BLUE		20	70
LP16-D24-W	WHITE		20	70
LP16-D24-A	AMBER		20	70

UNIVERSAL LAMP

NEW

MODEL	COLOUR	VOLT	MPQ	M.R.P.
XLP22-AD230-R	RED	12-240V AC/DC	10	60
XLP22-AD230-G	GREEN		10	60
XLP22-AD230-Y	YELLOW		10	60
XLP22-AD230-B	BLUE		10	60
XLP22-AD230-W	WHITE		10	60
XLP22-AD230-A	AMBER		10	60

DUAL COLOUR LAMP

MODEL	COLOUR	VOLT	MPQ	M.R.P.
DLP22-A230-RG	RED/GREEN	230V AC	10	150
DLP22-D24-RG	RED/GREEN	24V DC	10	150

ILLUMINATED BUZZER



Ø22.5mm

MODEL	COLOUR	VOLT	MPQ	M.R.P.
LB22-A230-R	RED	230V AC	10	154
LB22-A230-G	GREEN		10	154
LB22-A230-Y	YELLOW		10	154
LB22-A230-B	BLUE		10	154
LB22-D24-R	RED	24V DC	10	160
LB22-D12-R	RED	12V DC	10	166



Ø16mm

MODEL	COLOUR	VOLT	MPQ	M.R.P.
LB16-A230-R	RED	230V AC	20	205
LB16-D24-R	RED	24V DC	20	213
LB16-D12-R	RED	12V DC	20	213

VOLT METER



Ø22.5mm

MODEL	COLOUR	VOLT	MPQ	M.R.P.
LV22-A230-R	RED	20-500V AC	10	175
LV22-A230-G	GREEN		10	175
LV22-A230-Y	YELLOW		10	175
LV22-A230-B	BLUE		10	175

METER



FREQUENCY METER

TEMPERATURE METER

Ø22.5mm

MODEL	COLOUR	DESCRIPTION	MPQ	M.R.P.
LF22-50H-R	RED	50Hz	10	200
LT22-199-R	RED	0-199° C	10	500

CONTACT BLOCK



MODEL	TYPE	CONTACT TYPE	MPQ	M.R.P.
CB-R-C	NC	SILVER	50	49
CB-G-O	NO	SILVER	50	49

PUSH BUTTON ACTUATOR



METAL PUSH BUTTON Ø22.5mm

MODEL	COLOUR	MPQ	M.R.P.
AM22-R	● RED	10	80
AM22-G	● GREEN	10	80
AM22-Y	● YELLOW	10	80
AM22-B	● BLUE	10	80
AM22-W	○ WHITE	10	80
AM22-BK	● BLACK	10	80



PLASTIC PUSH BUTTON Ø22.5mm

MODEL	COLOUR	MPQ	M.R.P.
AP22-R	● RED	10	55
AP22-G	● GREEN	10	55
AP22-Y	● YELLOW	10	55
AP22-B	● BLUE	10	55
AP22-W	○ WHITE	10	55
AP22-BK	● BLACK	10	55



MUSHROOM ACTUATOR, LATCHING Ø40mm Ø22.5mm

MODEL	COLOUR	MPQ	M.R.P.
AM22-M40-R	● RED	10	123
AM22-M40-G	● GREEN	10	123
AM22-M40-Y	● YELLOW	10	123
AM22-M40-B	● BLUE	10	123
AM22-M40-W	○ WHITE	10	123
AM22-M40-BK	● BLACK	10	123

EMERGENCY ACTUATOR



EA40-R (METAL)

AP22-E40R (PLASTIC)

KY-EA40-R (METAL)

MODEL	TYPE	MPQ	M.R.P.
EA40-R	LATCHING 40MM DIA (METAL)	10	160
AP22-E40R	LATCHING 40MM DIA (PLASTIC)	10	98
KY-EA40-R	LATCHING 40MM DIA WITH KEY	10	344

SELECTOR ACTUATOR



SA2/3-BK

KY-SA2/3-BK

METAL SELECTOR ACTUATOR Ø22.5mm

MODEL	TYPE	POSITION	MPQ	M.R.P.
SA2-BK	STAY PUT	2 POSITION	10	114
SA3-BK	STAY PUT	3 POSITION	10	114
SA2-SR-BK	SPRING RETURN	2 POSITION	10	125
SA3-SR-BK	SPRING RETURN	3 POSITION	10	125

SELECTOR ACTUATOR WITH KEY Ø22.5mm

MODEL	DESCRIPTION	MPQ	M.R.P.
KY-SA2-OR	2 WAY WITH KEY REMOVABLE IN ONE POSITION	10	301
KY-SA2-BR	2 WAY WITH KEY REMOVABLE IN BOTH POSITION	10	301
KY-SA3-CR	3 WAY WITH KEY REMOVABLE IN CENTER POSITION	10	301
KY-SA3-CR-SR	3 WAY SPRING RETURN WITH KEY REMOVABLE IN CENTER POSITION	10	314



PLASTIC SELECTOR ACTUATOR Ø22.5mm

MODEL	TYPE	POSITION	MPQ	M.R.P.
SA2P-BK	STAY PUT	2 POSITION	10	78
SA3P-BK	STAY PUT	3 POSITION	10	78



ILLUMINATED SELECTOR Ø22.5mm

MODEL	TYPE	COLOUR	VOLT	MPQ	M.R.P.
SA2-IL-R	2 WAY	● RED	230V AC	10	397
SA2-IL-G		● GREEN		10	397
SA3-IL-R	3 WAY	● RED	230V AC	10	397
SA3-IL-G		● GREEN		10	397
SA2-IL-D24-R	2 WAY	● RED	24V DC	10	397
SA2-IL-D24-G		● GREEN		10	397
SA3-IL-D24-R	3 WAY	● RED	24V DC	10	397
SA3-IL-D24-G		● GREEN		10	397

ILLUMINATED PUSH BUTTON



ILLUMINATED METAL

Ø22.5mm

MODEL	COLOUR	VOLT	MPQ	M.R.P.
AM22L-A230-R	RED	230V AC	10	269
AM22L-A230-G	GREEN		10	269
AM22L-A230-Y	YELLOW		10	269
AM22L-A230-B	BLUE		10	269
AM22L-A230-A	AMBER		10	269
AM22L-D24-R	RED	24V DC	10	269
AM22L-D24-G	GREEN		10	269
AM22L-D24-Y	YELLOW		10	269

ILLUMINATED PLASTIC

Ø22.5mm

MODEL	COLOUR	VOLT	MPQ	M.R.P.
AP22L-A230-R	RED	230V AC	10	254
AP22L-A230-G	GREEN		10	254
AP22L-A230-Y	YELLOW		10	254
AP22L-A230-B	BLUE		10	254
AP22L-A230-A	AMBER		10	254

TWIN PUSH BUTTON



SH2-RG-M

SH2L-RG-M

Ø22.5mm

MODEL	DESCRIPTION	MPQ	M.R.P.
SH2-RG-M	FLUSH WITH IO MARK	10	166
SH2L-RG-M	230V AC ILLUMINATED	10	336

4 INCH AXIAL FAN



SL-12038-A230-W



BB-12038-A230-W

MODEL	TYPE	BEARING	VOLT	M.R.P.
SL-12038-A230-W	SQUARE	SLEEVE BEARING	230V AC	730
BB-12038-A230-W	SQUARE	BALL BEARING		875

8 INCH AXIAL FAN



BB-20060-A230-W



BB-SR-20060-A230-W



BB-22060-A230-W

MODEL	TYPE	BEARING	VOLT	M.R.P.
BB-20060-A230-W	SQUARE	BALL BEARING WITH CAPACITOR	230V AC	2890
BB-SR-20060-A230-W	SQUARE ROUND	BALL BEARING		2890
BB-22060-A230-W	ROUND	BALL BEARING		2890

6 INCH AXIAL FAN



BB-15050-A230-W



BB-17251-A230-W



BB-17050-A230-W



BB-SR-17251-A230-W

MODEL	TYPE	BEARING	VOLT	M.R.P.
BB-15050-A230-W	SQUARE	BALL BEARING	230V AC	1500
BB-17050-A230-W	ROUND	BALL BEARING		1500
BB-17251-A230-W	OVAL	BALL BEARING		1500
BB-SR-17251-A230-W	SQUARE ROUND	BALL BEARING		1500